webee®

GETTING STARTED WITH SMARTEE

This document is the property of Webee L.L.C. The data contained here, in whole or in part, may not be duplicated, used or disclosed outside the recipient for any purpose. This restriction does not limit the recipient's right to use information contained in the data if it is obtained from another source without restriction.

INDEX

Chapter 1: Installing your Smartee

Plugging your Smartee.....03
Connecting your Smartee to Internet.....04

Chapter 2: Registering your Smartee

Registering your Smartee.....05

Chapter 3: Using your Smartee with an HDMI monitor

Adding a Device.....06
Setting your preferences.....07

Chapter 4: Using your Smartee with a Smartphone

Downloading Webee App.....08
Connecting your Smartee to Internet.....09
Linking your Smartee to your account.....10
Adding your Devices.....11
Creating your first space.....12
Controlling your appliances.....13
Creating Rooms.....14
Creating Functions.....15
Creating Scenes.....16

Chapter 5: Using your Smartee on the Web

Logging into the Web App.....17
Creating your first space.....18
Linking your Smartee to your account.....19
Adding your Devices.....20
Creating Rooms/Functions.....21

Chapter 6: Z-wave functionalities

Accessing Z-wave console.....22
Description of Z-wave console.....23
Adding Z-wave devices to Smartee.....24
Removing Z-wave devices from Smartee.....25
Entering to the Learn Mode.....26
Smartee Z-wave capacities.....27

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

1 INSTALLING YOUR SMARTEE

1-Plug your Smartee to a power Supply and to TV HDMI connector.

2-Plug your Air Mouse Dongle to your Smartee in order to use your Air Mouse.

AIR MOUSE CHECK LIST

- Look carefully inside your package for the small white USB Dongle.
- Once the Dongle is connected make sure that the Air Mouse is charged. If it's blinking red and blue it means that raned out of battery.
- The Air Mouse will go to sleep mode after a while of being unused, just click on any button to restart it.
- While you Air Mouse is charging, you can plug any regular mouse to the USB port of your Smartee to continue enjoying the Webee experience.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

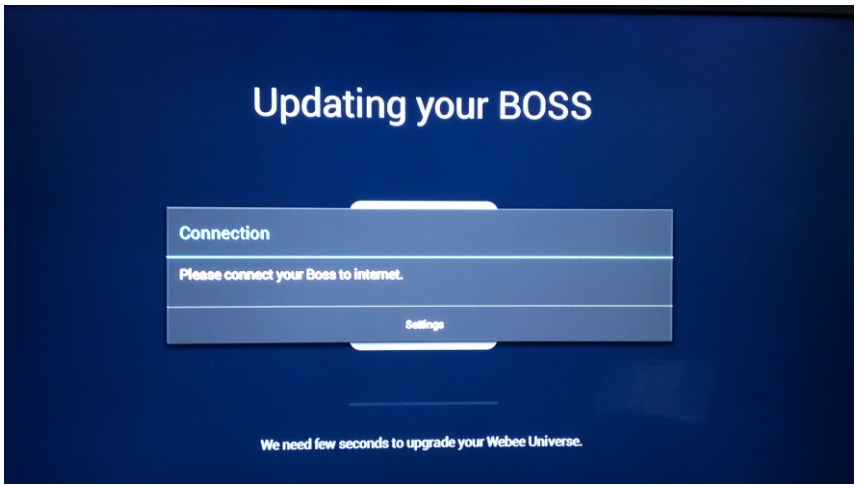
Updating your BOSS
Connection
Please connect your Boss to internet.
Settings
We need few seconds to upgrade your Webee Universe.

3-Connect your Smartee to Internet using a Wireless connection by clicking on “Settings” and selecting Wi Fi. Or plug an Ethernet Cable and the Smartee will connect automatically to the network.

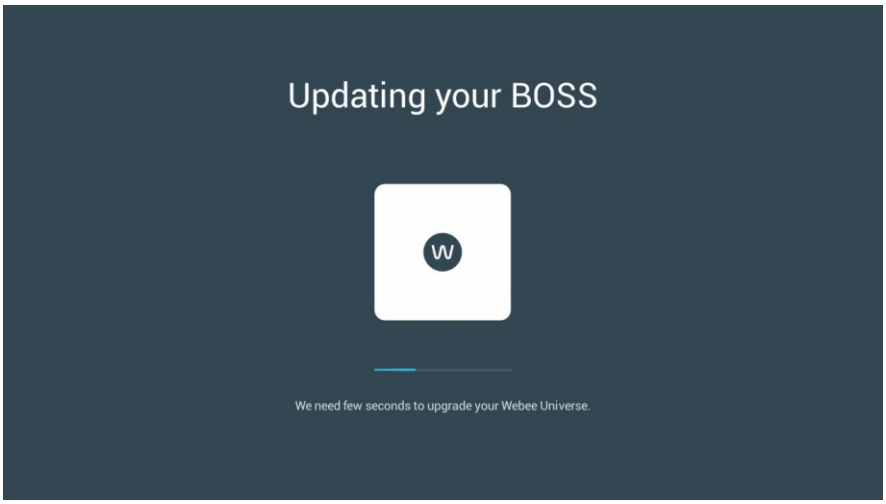

4-Smartee will automatically start downloading the most recent updates.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

2 REGISTERING YOUR SMARTEE

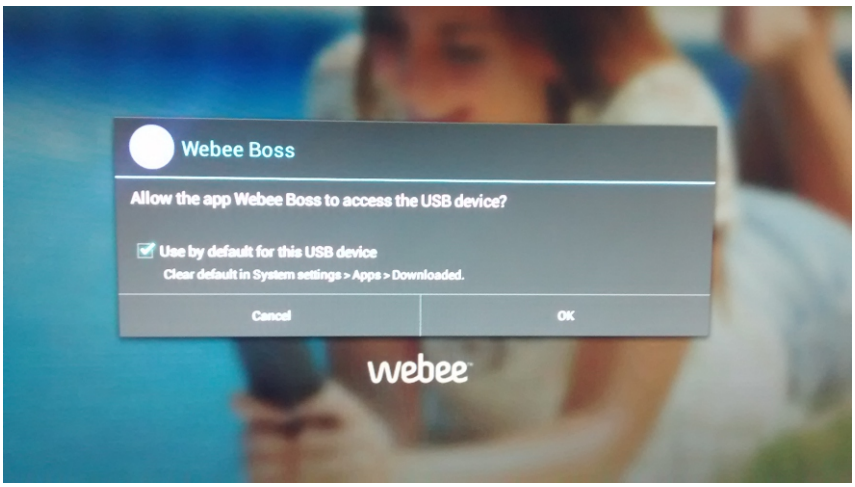
Webee Boss
Allow the app Webee Boss to access the USB device?
Use by default for this USB device
Clear default in System settings > Apps > Downloaded.
Cancel
OK
webee

5- Next, you will get a pop-up message asking to access the USB device. Make sure to add the checkmark and click OK to continue with the registration.

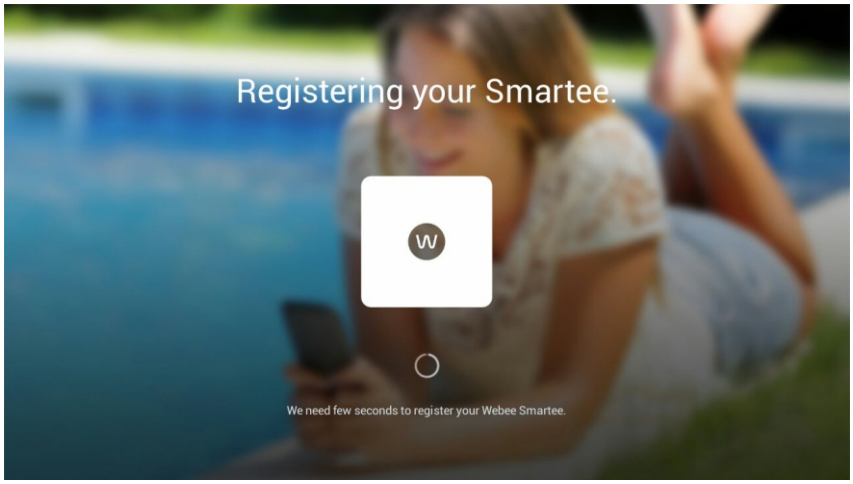

6- Your Smartee will start the registration process automatically.

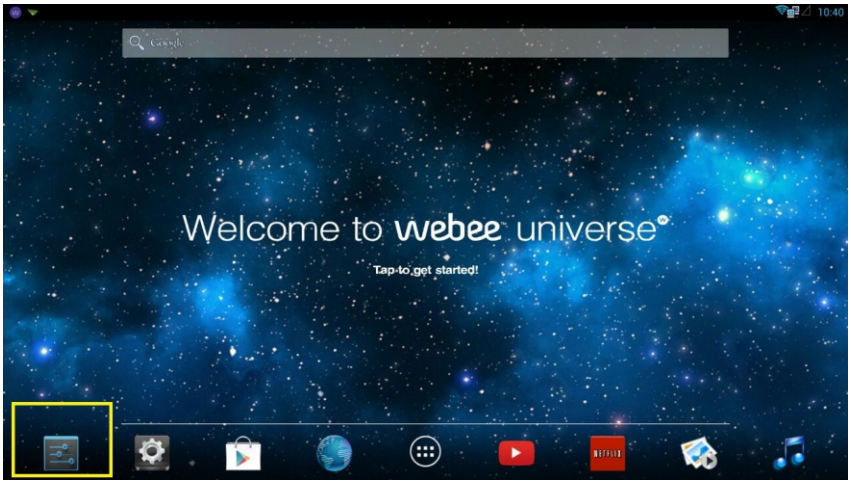

7- Done! Configure your Date and Time by tapping on the Settings Menu.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

3 ADDING DEVICES

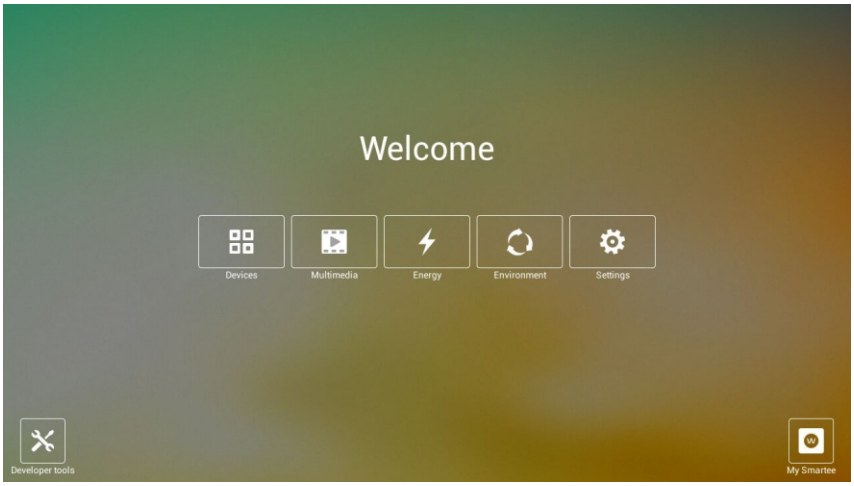

7- On the Welcome launchpad select Devices.

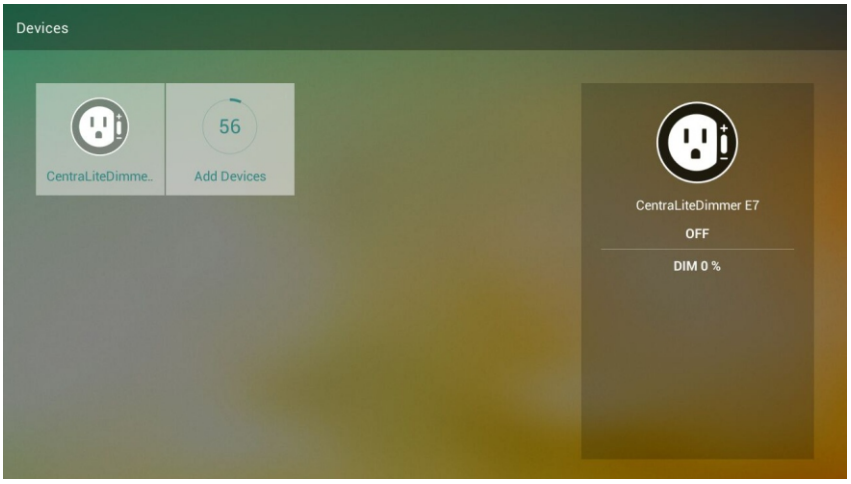

8- Tap to add devices, Smartee will automatically discover and connect the smart devices around. Make sure your devices are ready to join the network (check the device's manual for instructions)

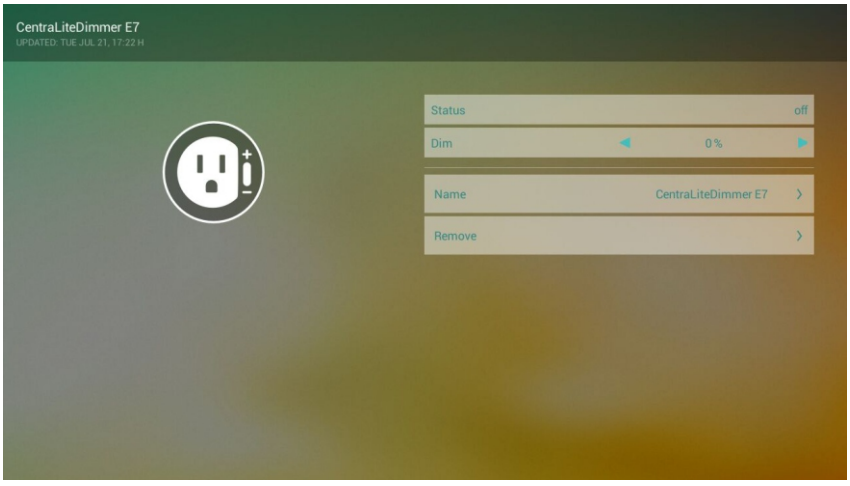

9- Rename your devices and star enjoying your automated home!

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

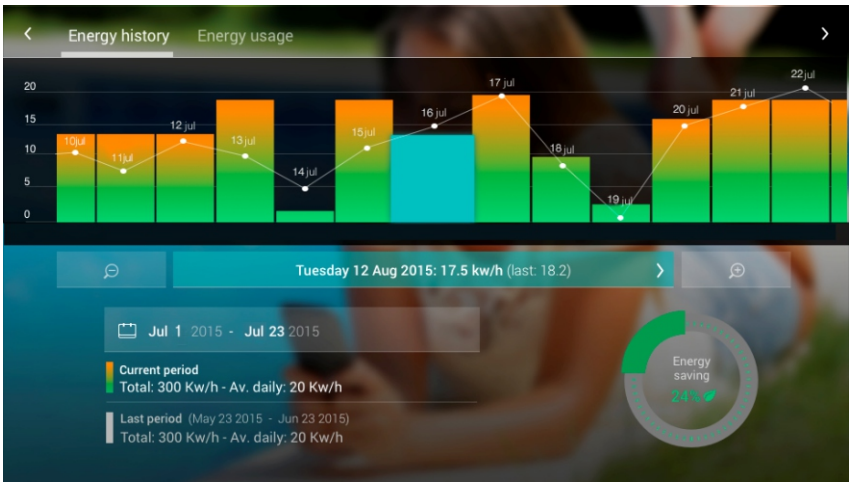
Energy history
Energy usage
Tuesday 12 Aug 2015: 17.5 kw/h (last: 18.2)
Jul 1 2015 - Jul 23 2015
Current period
Total: 300 Kw/h - Av. daily: 20 Kw/h
Last period (May 23 2015 - Jun 23 2015)
Total: 300 Kw/h - Av. daily: 20 Kw/h
Energy saving
24%

10-Access the Energy tab on the launchpad to monitor your energy consumption.

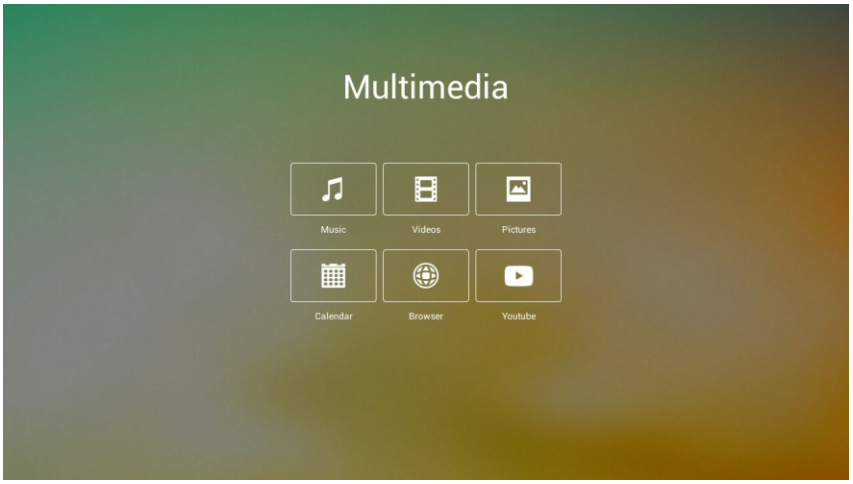

12-Tap the Multimedia tab to access all your music, videos and pictures stored on any external drive connected through the USB or Sdcard of Smartee.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

5 USING YOUR IOs and Android APP

1- Download the App from the store.
Enter MyWebee on the App Store or Play Store browser.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

3- If you haven't register your Smartee yet, follow the steps indicated above to connect your your Smartee to Internet using a Wi Fi connection.

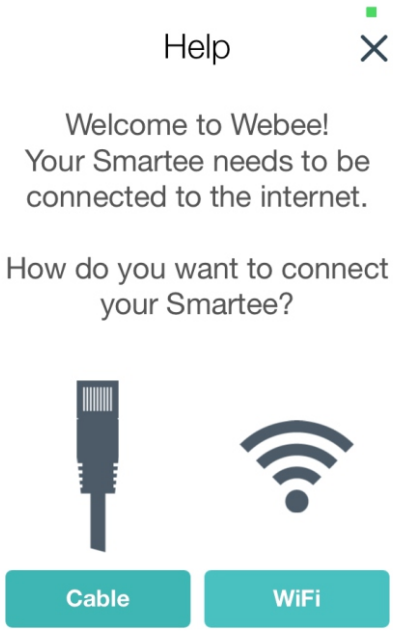
Help
Welcome to Webee! Your Smartee needs to be connected to the internet.
How do you want to connect your Smartee?
Cable
WiFi

4-Or follow the steps above to connect your Smartee to Internet using an Ethernet cable.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

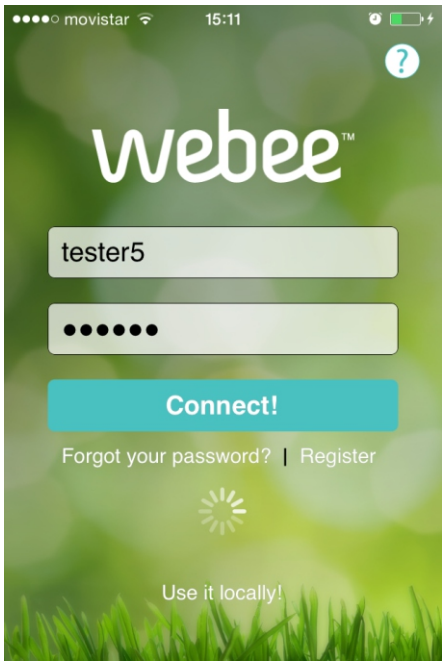

5- Register an account or log in if you have one already.
You can also create your account by entering our web www.webeelife.com.

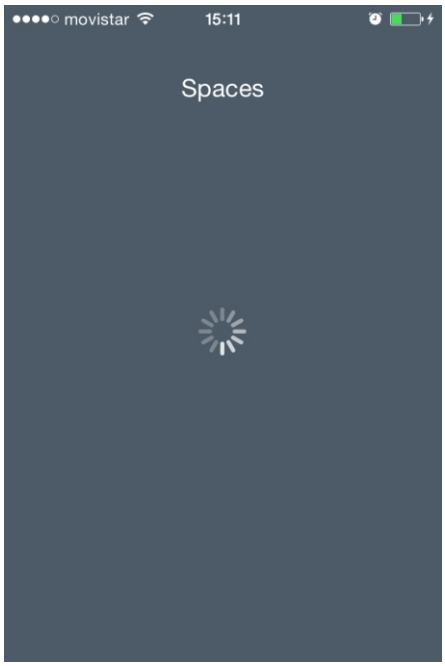

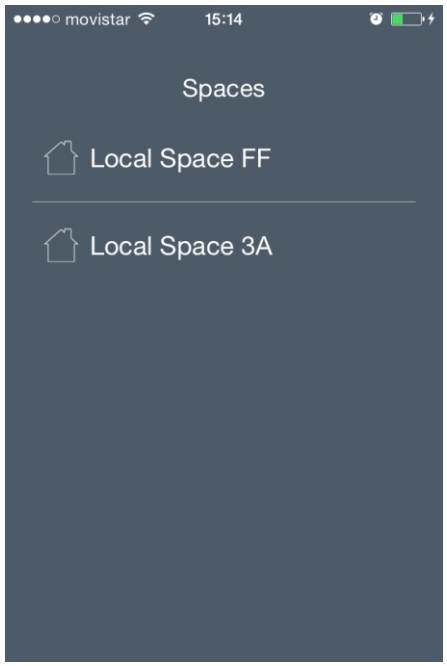

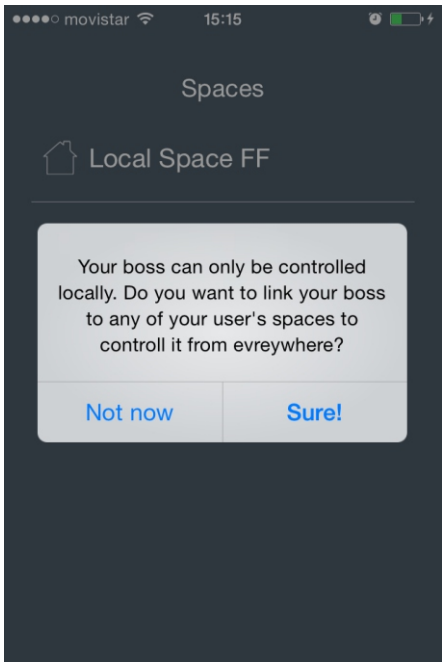
movistar 15:15
Spaces
Local Space FF
Your boss can only be controlled locally. Do you want to link your boss to any of your user's spaces to controll it from evreywhere?
Not now
Sure!

6- If you are using IOs, the app will automatically find your Smartee
(as long as the Smartee is connected to Internet and properly registered.
Just make sure to Click Sure! when getting the pop-up message to associate your Smartee.
If you are using Android, once you have created your space, you will be prompt to enter
your Smartee's MAC address, which is located on a sticker at the back of your Smartee

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

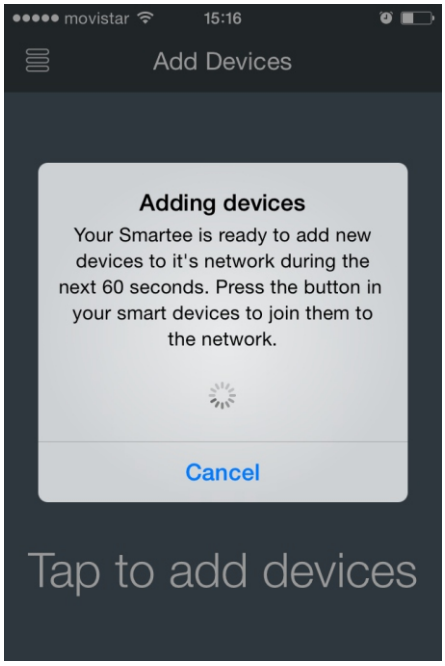
movistar 15:16
Add Devices
Adding devices
Your Smartee is ready to add new devices to it's network during the next 60 seconds. Press the button in your smart devices to join them to the network.
Cancel
Tap to add devices

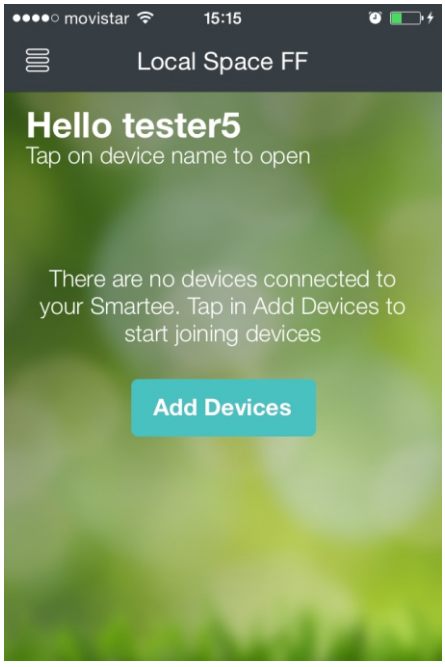
movistar 15:15
Local Space FF
Hello tester5
Tap on device name to open
There are no devices connected to your Smartee. Tap in Add Devices to start joining devices
Add Devices

7- On IOs, prior to creating your Space, you will be prompt to add your smart devices.
It is not necessary for you to add all your devices now; you can continue adding devices later on.
On Android, you will be able to create your Space prior to adding smart devices.

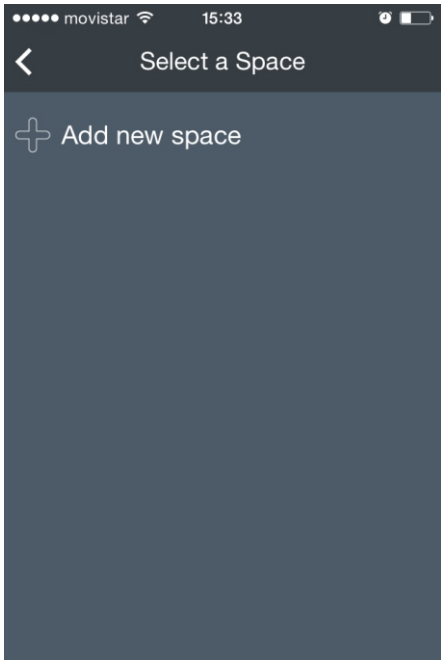

8-On IOs, Once you've finished adding your devices, you can move forward to “Add a new space”
For both IOs and Android, please notice that you will only need to create ONE space for your house.
You will be able to create different rooms associated to this space
later on. Ed kitchen, bedroom, living-room

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

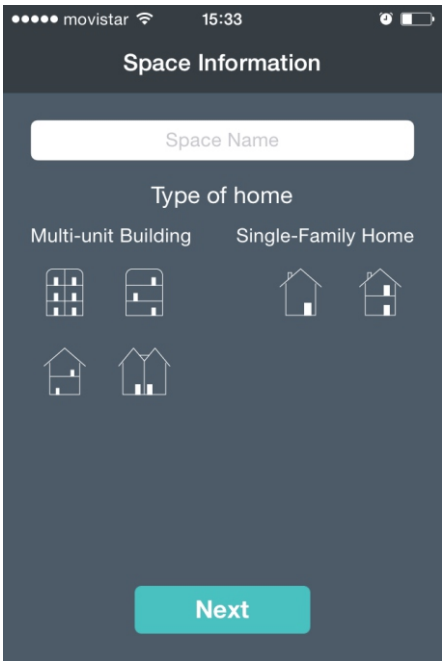

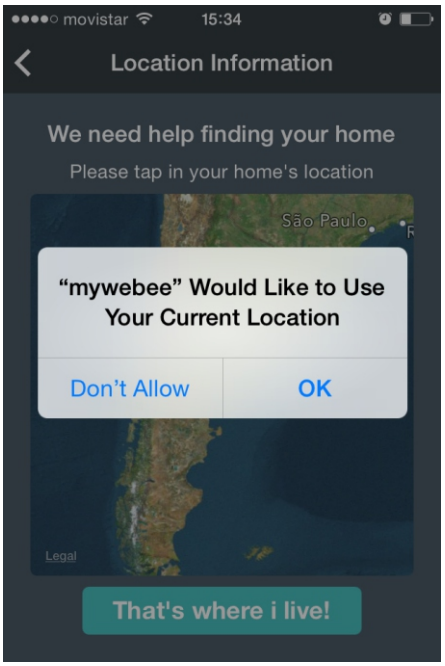

9- Follow the steps to create your first space. You will be ask to enter your location and some specific information that will help us to better configure your Smartee to maximize your experience.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

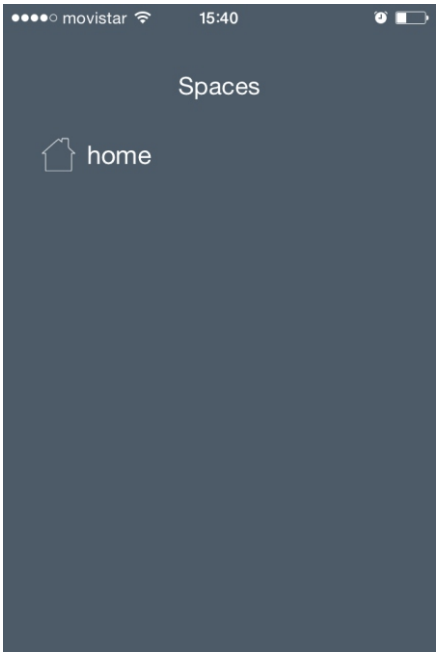

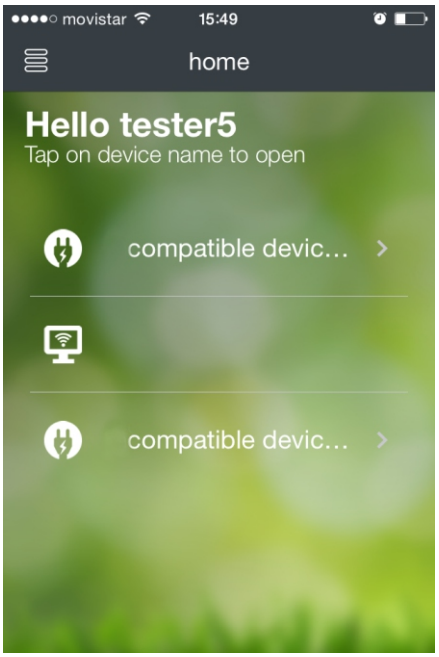

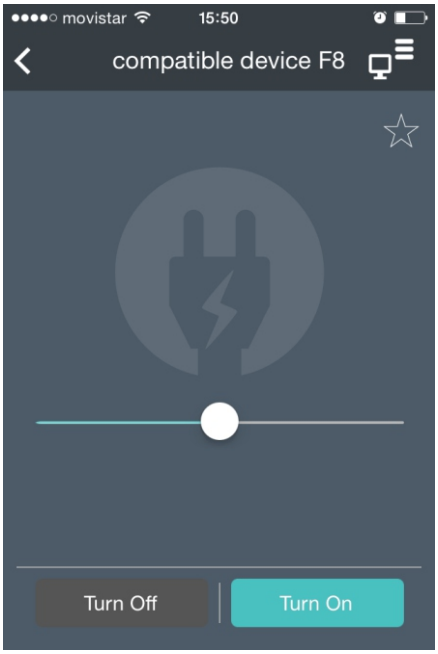

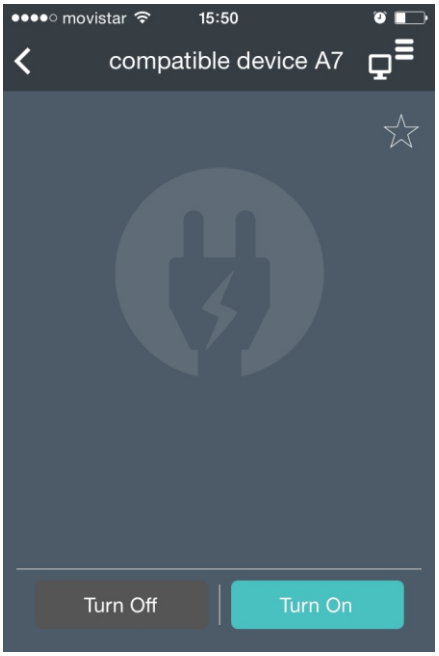

10- Once you have created your first Space,
you can access to it to start controlling your appliances.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

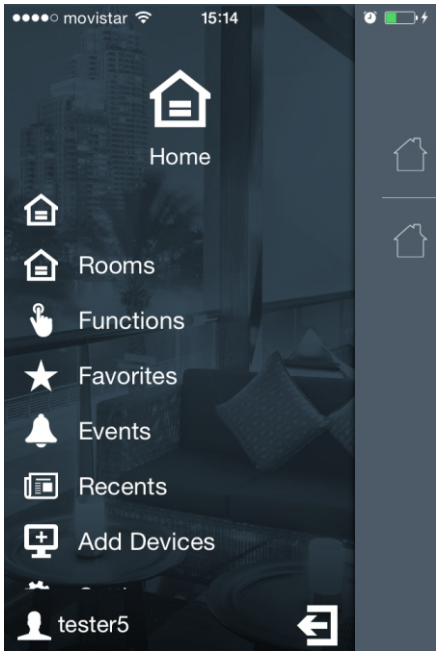

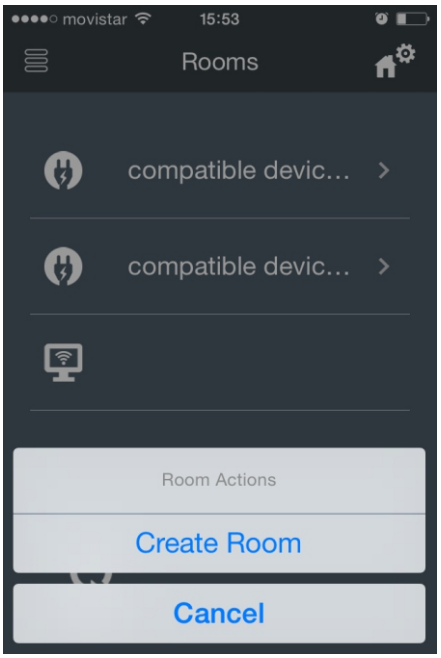

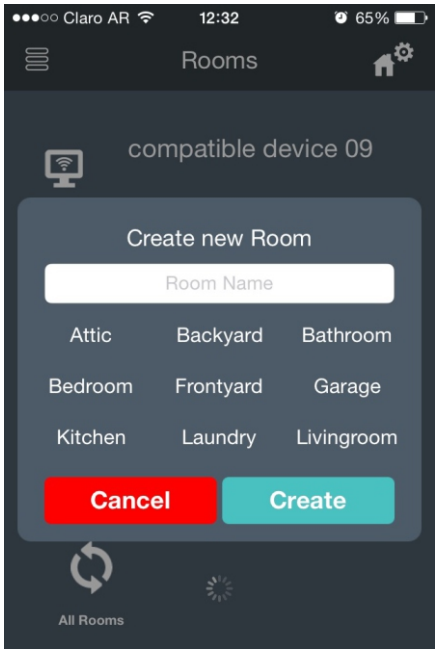

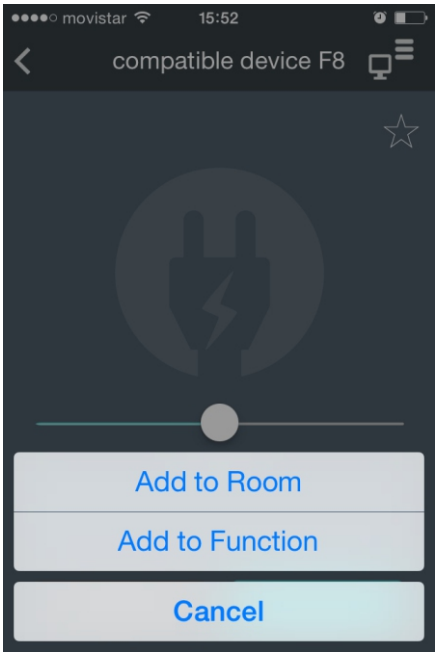

11- You can create a Room to group all devices that are located on the same room within your Space.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

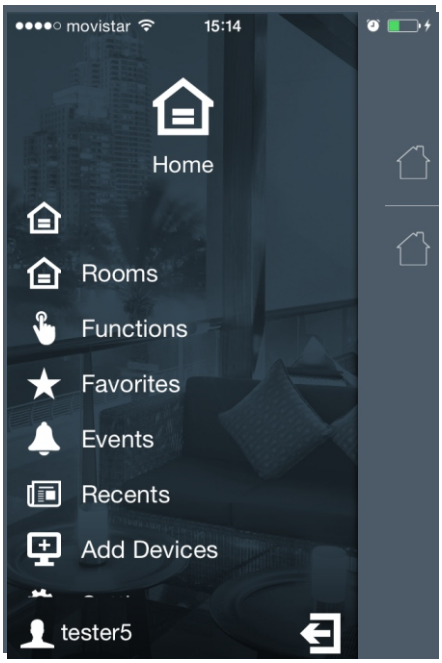

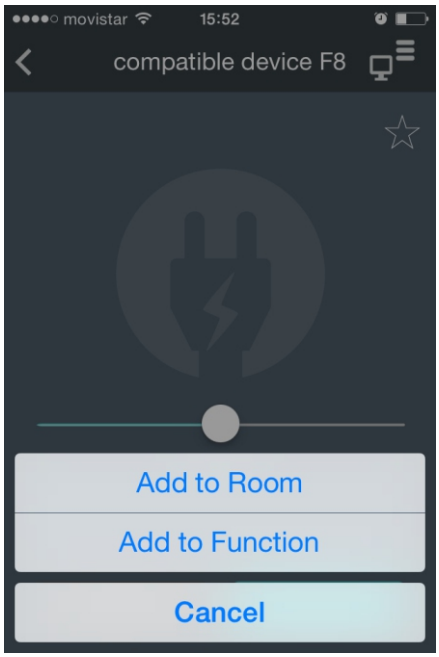

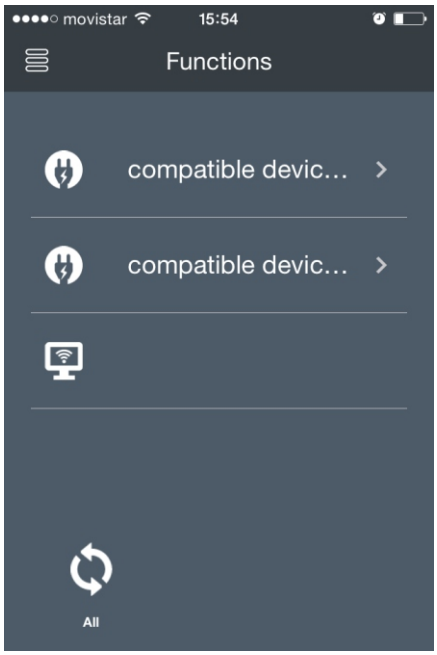

12- Or you can add your devices to a function, to group them by their functionality.
ED: Group all the lights from your house to Function LIGHT.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

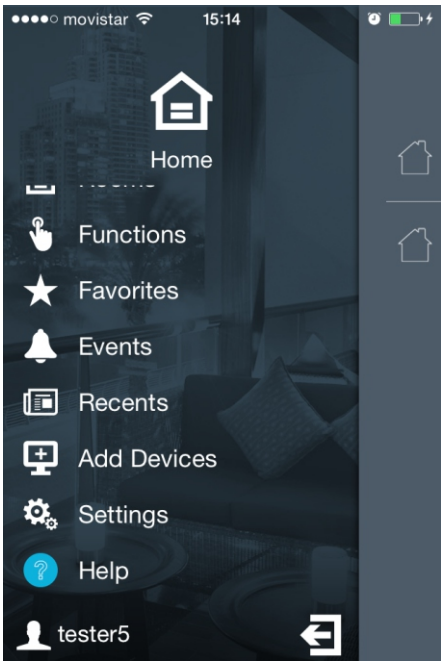

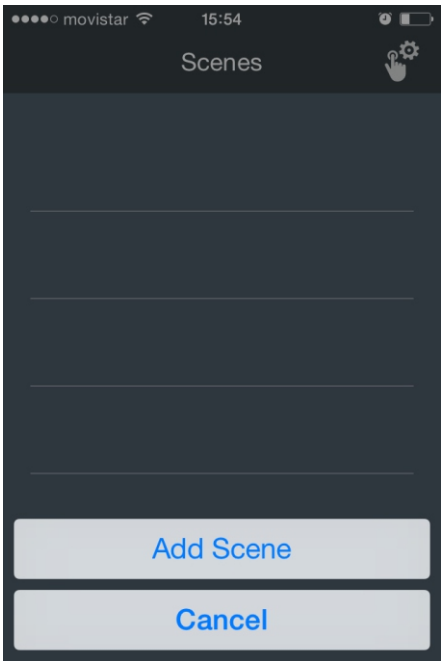

13- And you can group specific tasks and rules to create Scenes, which are a sequence of actions defined by your preferences. ED “Waking up”.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

5 USING YOUR SMARTEE ON THE WEB

1- Access my.webeelife.com and log in to your account.
Before starting, make sure your Smartee is connected to Internet and registered in our cloud.
If not please check step 1-5 of the Chapter 1 of this manual to learn how to do it.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

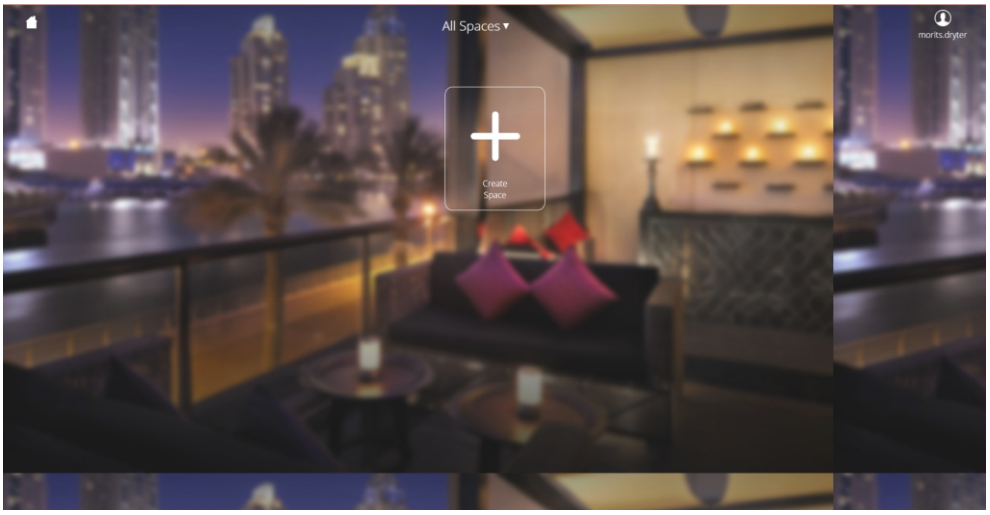

3-You will be prompt to create your first SPACE. If you have already created, it will be displaying on the screen.

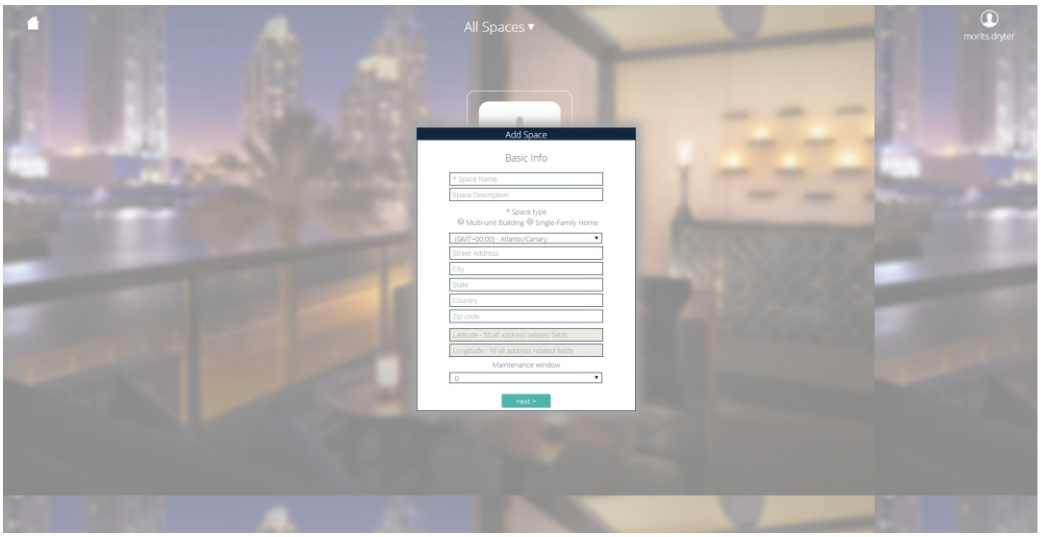

4- Complete all fields to create your space (if you haven't done it already)

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

4- Once you have created your space, click on the blue button ADD SMARTEE.

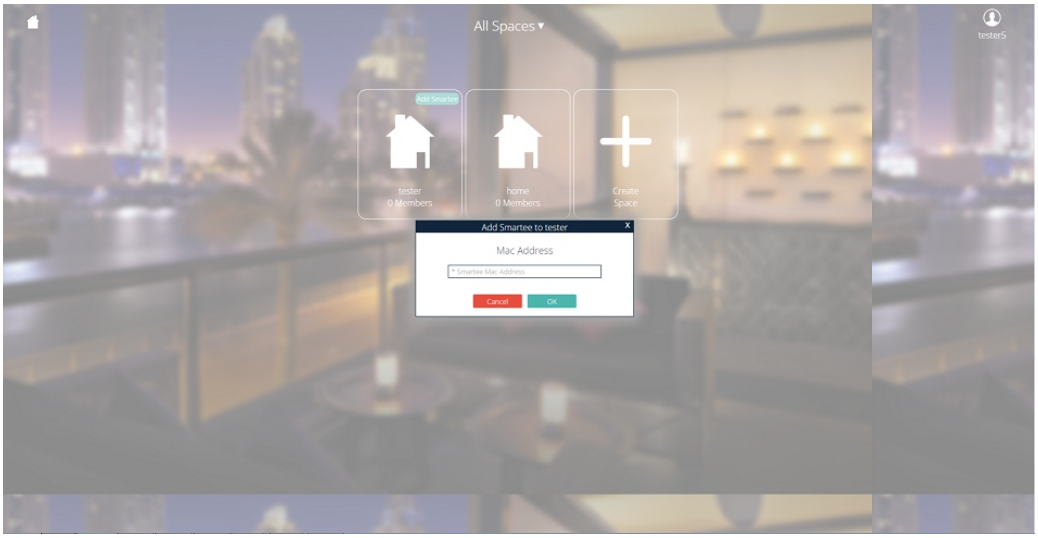

4- You will me prompt to enter your MAC address. Please enter using all capital letters an no colons.

6- Find your Mac Address at the bottom of your Smartee.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

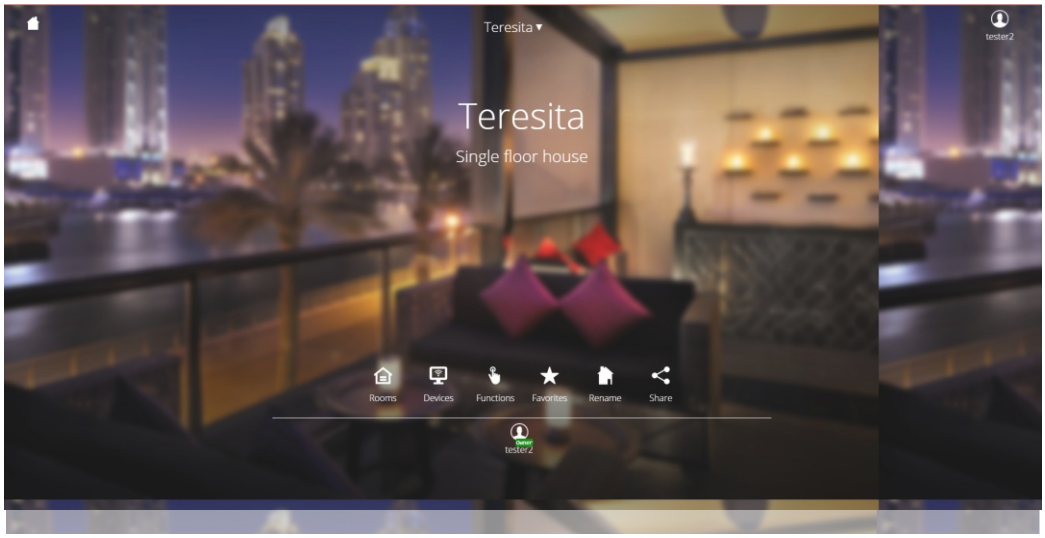

7- Once your Smartee is linked to your account ,you will be able to start adding and controlling your devices

8- To Add a Device, on the Main Menu select Devices.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

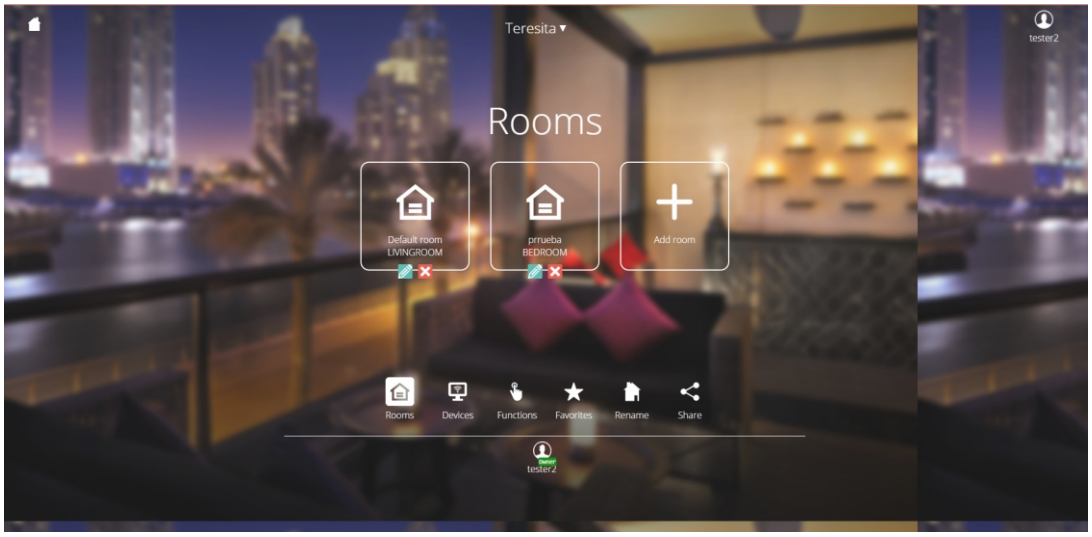

9- You will also be able to create Rooms to identify each room of your house within your Space. This way you can group devices by room.

10- You can also create Functions, grouping devices by function.
Perhaps you could group all lights together under Function “Lighting”.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

6 ZWAVE FUNCTIONALITIES

Description of Z-wave Console

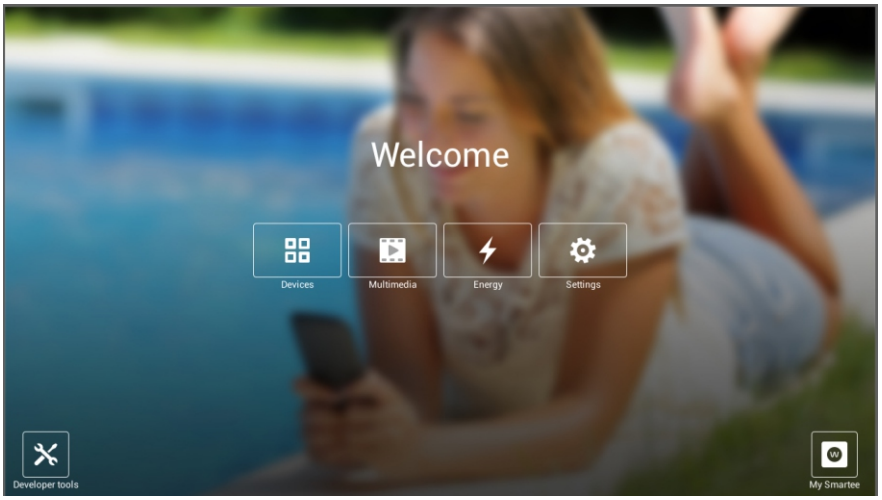

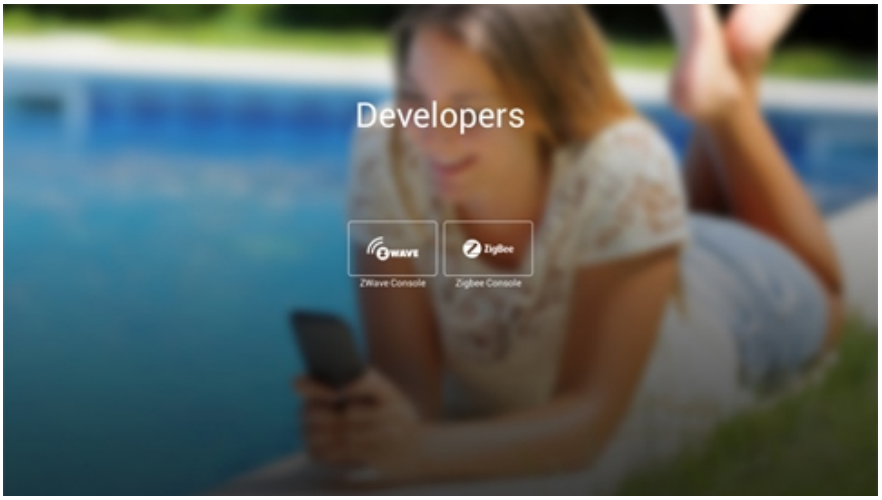

1- Go to “developer tools” and enter to “ZWave console”.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

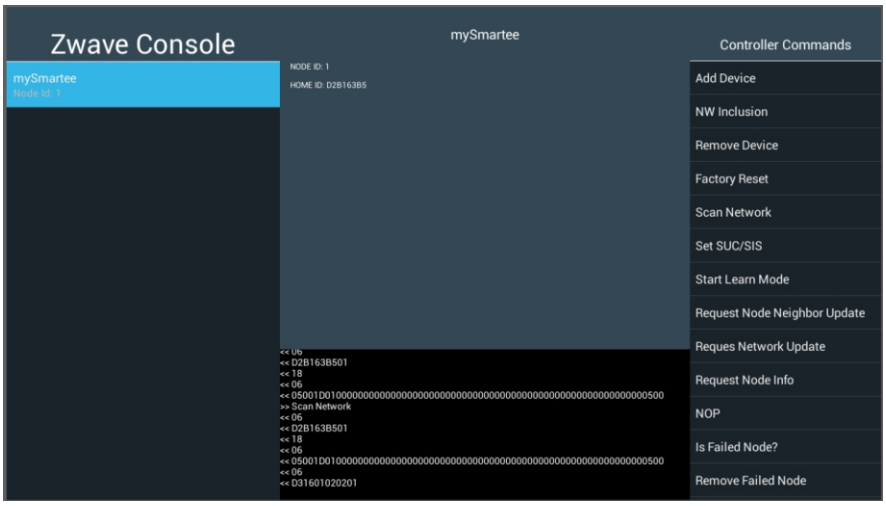

2-The z-wave console contains 3 panels: left-panel, center panel and right panel.

Left Panel: Is a scrollable panel and shows up the z-wave devices added to the z-wave network of the Smartee.
Center Panel: Shows the information and controls of the selected device.
Right Panel: Is a scrollable panel and contains all the controller commands related to z-wave networking management and basic control of z-wave devices.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

Adding Z-Wave devices to Smartee

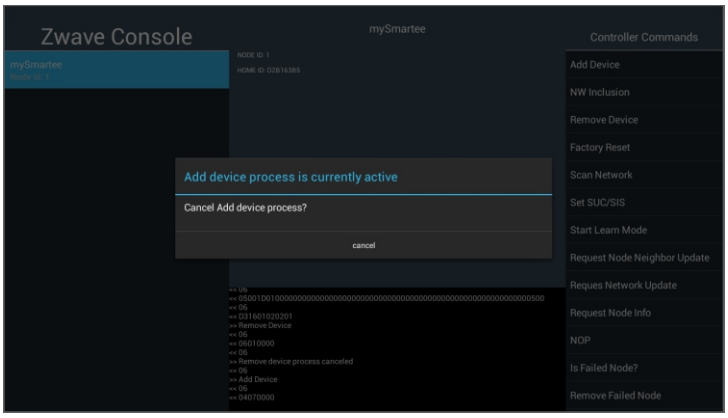

1-Tap on “Add Device” on the right panel for normal power inclusion or “NW Inclusion” for Network Wide Inclusion.
2- Press the Z-wave button on your device to add it (refer to device user manual).

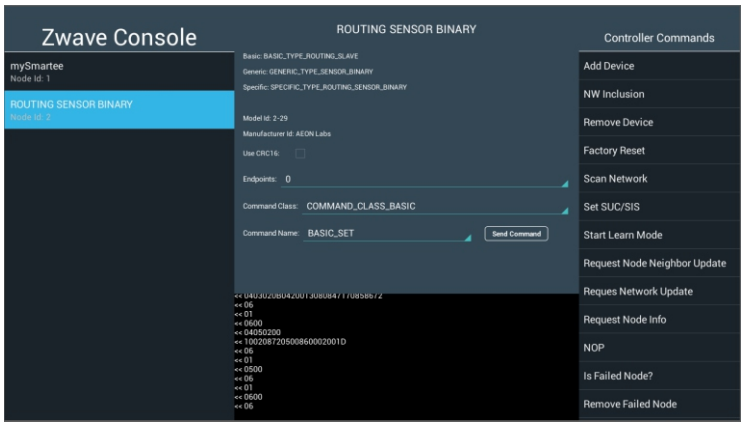

3-After a new device is detected, it will appear on the left side panel.
4-If the device was successfully added to the Smartee, all the device information will be at the center panel.

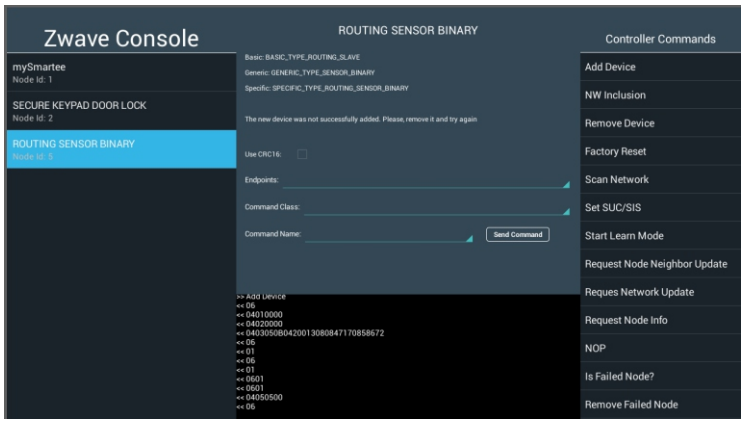

4-If the inclusion process fails, when selecting the device this message will appear: “The new device was not successfully added. Please, remove it and try again”.
In this case follow the remove device instruction and try again.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

Removing Z-Wave devices from Smartee

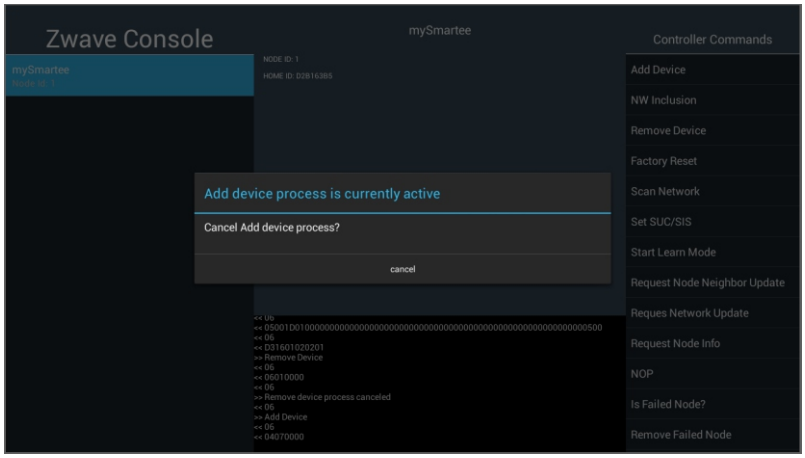

1-Tap on “Remove Device” on the right.
2-Press the Z-wave button on your device to be removed (refer to device user manual).

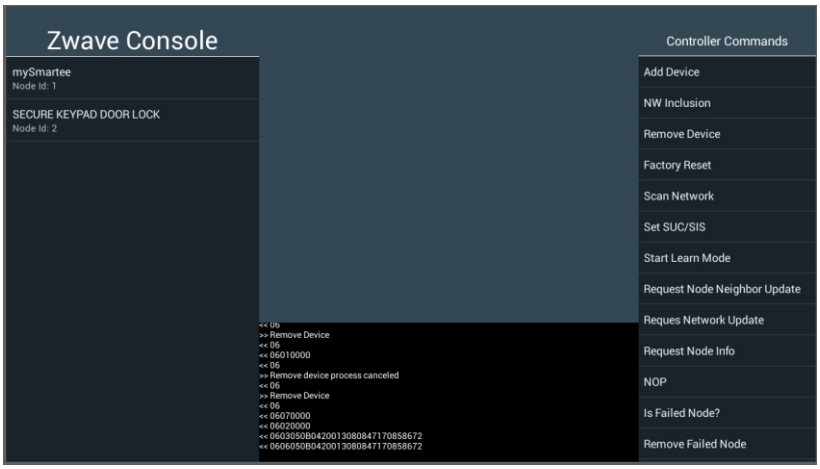

3-If the device was successfully removed, it will be removed from the left panel.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

Entering the Learn Mode

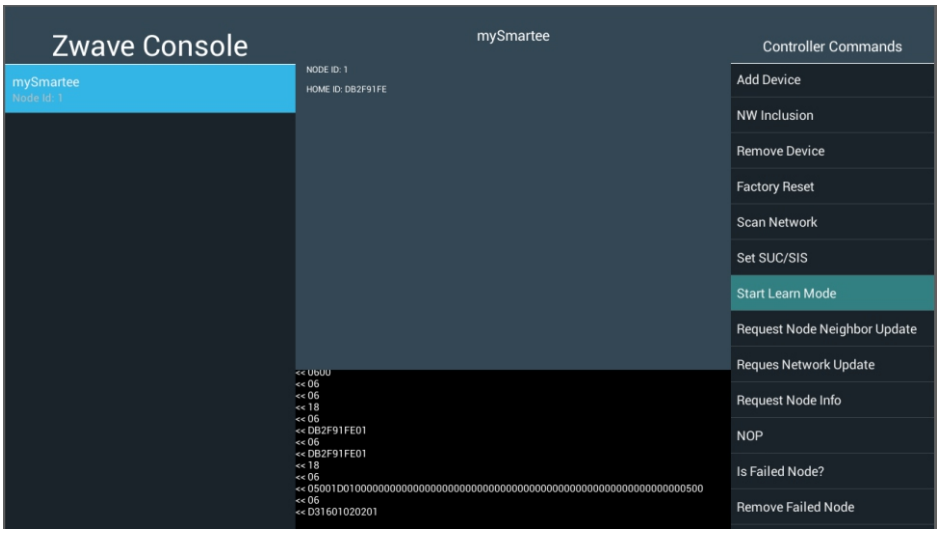

1- For this process, to add a Z-wave controller to Smartee,all the Z-wave devices must be removed from the Smartee. See “Remove Z-wave Device” on page 25.
2- The other Z-wave controller should be put into inclusion mode.
See controller’s instructions.
3-Tab on Start Learn Mode on the Right panel.
It may take longer to receive all the network info and load all the devices.
At the end of this process all the devices added to the other controller will appear in the left panel.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

Smartee Z-wave Capacities

- Basic Commnad Class Support:
  The Smartee does not map the Basic Command Class to any functionality.
  It ignores Basic Get requests.

- Association Command Class Support:
  The Smartee support Association Command Class. It has one association group ("Lifeline" group), only one device can be associated to this group.
  The Smartee will send reset notifications to the associated device when the hub is factory reset.

- Security Command Class Support:
  The Smartee is a Security-enabled device.
  When a security-enabled Z-Wave device is added to the hub's network, its secure communication will be 128-bit AES encrypted.

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC

V1.0 REV. January, 2015

webee®

© 2015 Webee LLC, All rights reserved. The Webee logo, Boss and Bees are trademarks or registered trademarks of Webee LLC